

High Speed Industrial Radio Modem

Product Overview

The Yokogawa 905U-D radio modem forms part of Yokogawa's Wireless Serial product range providing connectivity between RS232 or RS485 devices such as PLCs, intelligent transducers and dataloggers to supervisory computers such as SCADAs/HMIs.


The 905U-D combines 1 watt spread spectrum wireless technology, user friendly installation/ diagnostics, repeatability, addressing options and license-free use in industrial applications.

Features and Benefits

- RS232 and RS485 connections
- Configurable data communications to 115.2 kbps
- License-free 902-928MHz FHSS with sub-band availability
- Communication modes:
 - Transparent/ simultaneous broadcast messaging
 - Addressable/ specific field device messaging
- LOS distance to 20 mi/ 32 kms (single hop): unlimited repeatability options
- Low power consumption mode with DTR control
- Hayes AT commands or Windows software configurable
- Diagnostics including- radio signal strength and BER indication
- Forward error correction communications (CRC error checking with ARQ)

Applications

- Monitoring, control and reporting for:
 - Oil /Gas field production/ distribution
 - Water /Waste water to SCADA
 - PLC - PLC - SCADA/DCS connection
 - Electrical metering/ consumption
 - Serial transducer devices to SCADA/HMI
 - Serial datalogger connectivity
- Surveillance/ monitoring of:
 - Conveyor belt header drums
 - Notification panels and sirens

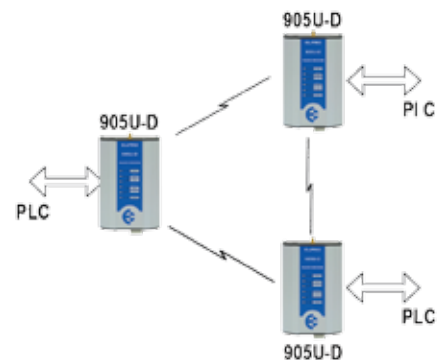

PLC Network - Transparent Mode

SPECIFICATIONS

Serial Port

- Standard data rates 1200 to 115200 baud.
- RS232 and RS485 standard interface connections provided, each connected to the same serial port. Serial interfaces are asynchronous non-return-zero (NRZ) format
- Characters supported 7 or 8 data bits, even/odd/no parity, 1 or 2 stop bits
- RS232 connection provides full duplex operation as a DCE device with RTS/CTS hardware handshaking- standard D9 connector.
- RS485 connection provides half duplex operation for twisted pair multidrop networks.
- Input and output buffers 2Kbyte

Power Supply

- 10 - 30 VDC or 10 - 24 VAC supply
- Normal current drain 70mA/12VDC or 50mA/24VDC
- Current when transmitting 350mA/12V or 250mA/ 24V
- Low power mode current drain 20mA/12VDC or 15mA/24VDC

Radio Transceiver

- Frequency Hopping Spread Spectrum Transceiver
- Frequency - USA/Canada 902 - 928 MHz
- Hop Sequence - 16 x 50
- Transmit Power 1W
- RSSI -120 to -60 dBm
- Expected line-of-sight range, depending on local conditions - USA/Canada 20+ miles
- RF Data Transmission Rate - 19200 baud, 57600 baud, 115200 baud (selectable)
- Range may be extended by: - up to five intermediate repeaters in controlled mode - unlimited repeaters in transparent mode
- Conforms to FCC Part 15 Class A and FCC Part 15.247
- Antenna connection is SMA coaxial

Configuration and Diagnostics

- Configuration by freeware software package or by Hayes AT commands. Radio noise, signal strength and bit error rate (BER) diagnostics included. Radio signal strength value available on-line to host device.

Data Transmission

- Transparent mode: Data is transmitted with a system and group address. Data transmission begins as serial data is received - maximum packet size is 530 bytes. All modules, with correct system address, which receive the data packets, outputs the data - error checking is optional.
- Controlled mode: Data is transmitted in packets with a system address, source address, destination address, up to five intermediate repeater addresses, and a 16 bit CRC error check. If the packet is received with a correct error check, only the destination module will output the data and will also return an ACK transmission. If the source module does not receive the ACK, it will retry a further four times. DCD provides communications status.
- Auto-connect and dial-up-control modes are available.
- CTS/RTS flow control provided based on input buffer availability.

General

- Environmental -40 to +140 degF (-40 to 70 degC)
- EMC Compliant FCC Part 15 Class A
- Housing, extruded aluminum case 4.5"x 7.3"x 1.2"(114 x 185 x 30mm) DIN rail mounting, removable terminal blocks for ease of module replacement, terminals suitable for 12 gauge (2.5sqmm) conductors
- LED indication for unit OK, radio TX and RX, serial TX and RX, DCD (comms OK)

vigilantplant.[®]

SEE
CLEARLY

KNOW
IN ADVANCE

ACT
WITH AGILITY

The clear path to operational excellence

VigilantPlant is Yokogawa's automation concept for safe, reliable, and profitable plant operations. VigilantPlant aims to enable an ongoing state of Operational Excellence where plant personnel are watchful and attentive, well-informed, and ready to take actions that optimize plant and business performance.

Yokogawa Corporation of America

North America

2 Dart Road, Newnan, GA 30265-1094, USA
Phone: 800-258-2552 Fax: 770-254-0928

12530 West Airport Blvd., Sugar Land, TX 77478
Phone: 281-340-3800 Fax: 281-340-3838

Mexico

Urbina No. 18
Fracc. Parque Industrial Naucalpan
Naucalpan de Juarez, Estado de Mexico, CP 53489
Phone: (55) 5955-7400 Fax: (55) 5955-7417

Yokogawa Canada, Inc.

Bay 4, 11133 40th Street SE, Calgary, AB Canada T2C2Z4
Phone: 403-258-2681 Fax: 403-258-0182

<http://www.yokogawa.com/us/>

Represented by: